




机框/风叶: PBT塑料
 耐压: 交流500V持续1分钟,漏电源小于5毫安
 绝缘度: 在引线与机框之间直流500V电压时10兆欧
 工作温度: -20°C~80°C
 工作湿度: 20%~85%
 使用寿命(25°C时): 滚珠轴承风扇5万小时, 含油轴承风扇为3万小时

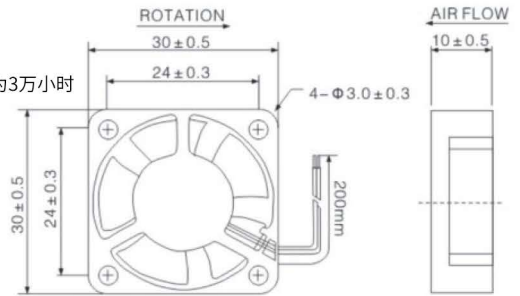

Specification

Model	Bearing	Rated voltage	Rated current	Rated input power	Nominal speed	Air flow		Air pressure		Noise (dBA)	Weight (g)
		(V)	(A)	(W)	(RPM)	(CFM)	(m ³ /min)	(mm/H ₂ O)	(inch-H ₂ O)		
DF3010B(S)5H	sleeve/ball	5	0.15	0.75	10000	4.10	0.11	4.52	0.18	29.0	8
DF3010B(S)5H	sleeve/ball	5	0.12	0.60	8000	3.27	0.09	3.57	0.14	23.0	
DF3010B(S)5L	sleeve/ball	5	0.10	0.50	6000	2.46	0.07	2.00	0.08	18.0	
DF3010B(S)12H	sleeve/ball	12	0.12	1.44	10000	4.10	0.11	4.52	0.18	29.0	
DF3010B(S)12M	sleeve/ball	12	0.10	1.20	8000	3.27	0.09	3.57	0.14	23.0	
DF3010B(S)12L	sleeve/ball	12	0.08	0.96	6000	2.46	0.07	3.00	0.12	18.0	